

# VERANDA ROOF ORDER FORM

**ACCOUNT No.**

Company Name .....

Order Number .....

Job Reference .....

Company Contact .....

Telephone No. ....

Fax No. ....

Delivery Address .....

.....

.....

Delivery Date Req .....

Quotation Ref .....

## PLAN VIEW OF ROOM AND DIMENSIONS

ROOF COLOUR							BESPOKE COLOUR	ROOF/SITE INFORMATION	
	WHITE	DEEPLAS	MAHOGANY	LIGHT OAK	ROSEWOOD	RAL/BS COLOUR		ROOF PITCH .....	
EXTERNAL	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	.....	ROOF HEIGHT RESTRICTION .....	
INTERNAL	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	.....	INSTALLATION POSTCODE .....	
								FRAME WIDTH .....	

BAR TOP CAPPINGS		BAR UNDERCLADDINGS		SUPPORT POST	
<input type="checkbox"/> DOME	<input type="checkbox"/> STANDARD	<input type="checkbox"/> STANDARD		<input type="checkbox"/> OAK	
<input type="checkbox"/> BEVEL	<input type="checkbox"/> ALUMINIUM	<input type="checkbox"/> ROUND	<input type="checkbox"/> SQUARE	<input type="checkbox"/> ROUND ALUMINIUM	

DETAIL UNDER EAVES BEAM		INTERNAL FASCIA CLADDINGS		WALLPLATE TYPE		RWP	
<input type="checkbox"/> FIXED FRAMES	<input type="checkbox"/> BI-FOLDS	<input type="checkbox"/> STD PFTBV	<input type="checkbox"/> ULTRASELECT	<input type="checkbox"/> MK 5 HALF RIDGE		<input type="checkbox"/> CHAINS	
<input type="checkbox"/> WIDTH OF BI-FOLD .....		ULTRASELECT STYLE .....		<input type="checkbox"/> VENTILATED		<input type="checkbox"/> ROUND	
<i>N.B. Bi-folds greater than 3m could require goalpost</i>						<i>Concealed in Round Support Post</i>	

GLAZING OPTIONS				
<b>ANTI SUN (1.2)</b>	<b>ANTI SUN (1.5)</b>	<b>CLEAR</b>	<b>UNGLAZED</b>	<b>CONSERVAGLASS</b> - MS POLYMER SEALANT MUST BE USED
<input type="checkbox"/> A1 (BLUE)	<input type="checkbox"/> B1 (BLUE)	<input type="checkbox"/> C1 (1.2)	<input type="checkbox"/> 25MM POLY	<input type="checkbox"/> SUBTLE BLUE
<input type="checkbox"/> A2 (GREY)	<input type="checkbox"/> B2 (GREY)	<input type="checkbox"/> C2 (1.5)	<input type="checkbox"/> 24MM GLASS	<input type="checkbox"/> NEUTRAL CLEAR

POLYCARBONATE		SPACER BAR COLOUR - GLASS UNITS		ROTABOND SEALANT - MS POLYMER	
<input type="checkbox"/> CLEAR	<input type="checkbox"/> OPAL	<input type="checkbox"/> SILVER (Default)	<input type="checkbox"/> GOLD	<input type="checkbox"/> WHITE (NCGS001W)	NO. TUBES REQ: .....
<input type="checkbox"/> BRONZE	<input type="checkbox"/> BRONZE/OPAL	<input type="checkbox"/> BRONZE	<input type="checkbox"/> WHITE	<input type="checkbox"/> BLACK (NCGS001B)	<i>N.B. For use with Conservaglass</i>

CRESTING				FINIAL		
<input type="checkbox"/> RENAISSANCE	<input type="checkbox"/> CLASSIC	<input type="checkbox"/> TUDOR	<input type="checkbox"/> BAROQUE	<input type="checkbox"/> PIKESTAFF	<input type="checkbox"/> CORONET	<input type="checkbox"/> LOW PROFILE
<input type="checkbox"/> ELIZABETHAN	<input type="checkbox"/> LOW PROFILE	<input type="checkbox"/> ALUMINIUM		<input type="checkbox"/> CLASSIC	<input type="checkbox"/> SCEPTRE	<input type="checkbox"/> ALUMINIUM

TIE BARS		CONSERVAFLASH		ROOF VENT		ROOF VENT MECHANISM	
<input type="checkbox"/> ROOF COLOUR	<input type="checkbox"/> BRASS	<input type="checkbox"/> YES		<input type="checkbox"/> PVC		<input type="checkbox"/> MANUAL WITH BRASS	<input type="checkbox"/> MANUAL WITH CHROME
<input type="checkbox"/> TBRK (If possible)	<input type="checkbox"/> CHROME	<input type="checkbox"/> SOAKER ONLY		<input type="checkbox"/> ALUMINIUM		<input type="checkbox"/> ELECTRIC WITH SWITCH	<input type="checkbox"/> ELECTRIC WITH RAIN SENSOR/THERMOSTAT

## ANCILLARY EXTRAS

**FAX BACK TO PREMIER FRAMES on 01162 264 009**

SIGNED .....


DATE .....

**ultraframe**  
Transforming light and space

# RULES FOR VERANDA ROOF

- Roofs are to be Pre-erect
- Lead times on Veranda Roofs are on 4 weeks from receipt of signed confirmation
- Confirmation from the customer on what is going underneath the eaves beam must be supplied to enable accurate structural stability
- If a customer is having full span bi-folding doors then the roof may require a goal post
- Muntin Bar is specified in the position between the CRN/2 and the eaves due to the uplift of the roof which may cause vibration to the glass and if in one piece it could shatter – if a customer requires another piece of muntin further up the roof this can be supplied in addition to the 1 piece.
- We advise our customers to take the veranda beam at 5-10° pitch – if they require a steeper pitch this is possible but an additional cost could be incurred for the special veranda endplates that have to be made on a job by job basis, and also the CRN/2 cannot be used as the bars will clash with the top of this.
- FFL – (finished floor level) we need to know what the customer is going to have to the external of the roof so that we can ensure that the support posts will work and be supplied to the correct length.
- If the roof design incorporates a 90° return then the facet size and pitch will need to be the same – this is because the weld line for the veranda beam needs to match
- If support posts need extending below FFL please state length required.

## SIDE VIEW DETAIL OF VERANDA BEAM

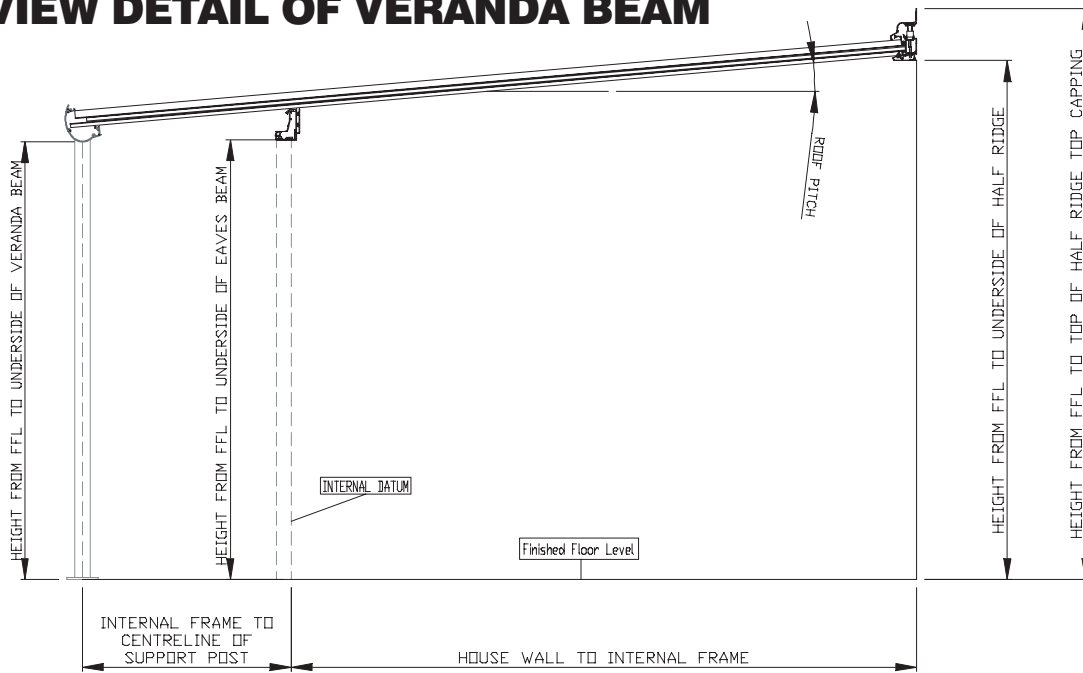

## SIDE VIEW DETAIL OF REVERSE VERANDA BEAM

