

ORDER FORM

- ORDER** sales@premierframes.co.uk
- QUOTE** sales@premierframes.co.uk
- New Build Replacement Project


Please sketch your Ultrasky lantern here.

- Please note all dimensions are to external face of 70 mm timber kerb.

PLAN VIEW

example:

Typical design - Small



Typical design - Large



(Optional additional bars)

ACCOUNT No.

Company Name

Order Number

JOB REFERENCE

Company Contact

Telephone No.

Email

Delivery Address

.....

.....

POSTCODE

Delivery Date Req

Quotation Ref

CRITICAL INFORMATION

***Required for structural snow / wind loading**

*Site Postcode

Please tick if height is greater than one storey.

Height above ground level

CUSTOMER NOTE: Please carefully read the Ultrasky Lantern installation guide before filling in order details.

HOW TO PLACE AN ORDER FOR ULTRASKY LANTERN:

1. Sketch plan & elevations.
(If necessary, attach photos of existing property. Indicate on drawings if any part of project is existing).
2. Mark the preferred positions of any
 - a) roof windows
 - or b) rectangular glazed panels.
3. Upon placement of your Ultrasky Lantern order, an order confirmation is generated which must be signed and emailed back.

Job No.:3598

ORDER FORM

JOB REFERENCE

ROOF MATERIALS

	PVCu White	PVCu Painted Grey	PVCu Black	Aluminium 9003 White 80% gloss	Aluminium 7016 Grey 30% gloss	Aluminium 9005 Black 60% gloss
External	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Internal	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Bespoke Colour

External

Internal

ROTABOND SEALANT - MS POLYMER

Black (NCGS001B) No. Tubes Req: N.B. For use with glass

GLASS OPTIONS - WARM EDGE SPACER

Pilkington NC Activ Neutral Pilkington SB Activ Blue Pilkington CL Activ Clear Unglazed


ROOF VENTS AND MECHANISM (mark plan)

- PVCu Internal Cladding Aluminium Internal Cladding
- Brass Manual Spindle Manual Spindle and pole Manual Spindle and telescopic pole
- Chrome Manual Spindle Manual Spindle and pole
- Electric motor with digital thermostat and rain sensor Electric motor and rocker switch
- Electric motor with radio and remote control Electric motor with thermostat (AVTD002)
- Electric without switch/thermostat (Motor only)

ANCILLARY EXTRAS

SPECIFICATION

1. Set out is always measured to external face of timber kerb.
2. Timber kerb should be a minimum of 150 mm x 70 mm wide (not supplied).
3. Width up to 4000 mm. Length up to 6000 mm - nominal sizes (4000X5851 Ext kerb sizes).
4. Fixed pitch of 25 degree all round.
5. Double ended hipped (rectangle shape).
6. Supplied glazed or unglazed for 24 mm sealed units - glazing overhangs, no gutter.
7. We will always design with the minimum number of bars - if you require additional and specific bars, please mark on drawing above.

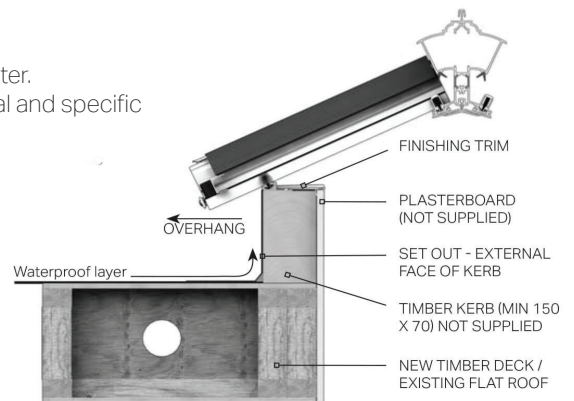

DISCLAIMER

The builder/installer is responsible for providing / checking structural timber deck Building Regulation applications MAY be needed depending upon application. In certain commercial applications, restrictions in the use of the product may apply. **Contact 01200 452918 for guidance.**

NOTE: 2 weeks lead time from signed confirmation on Black Ali or painted PVCu Lantern and coloured roof vents.

Job No.:3598