


Classic Low Pitch Roof Order Form

All dimensions to be **INTERNAL FRAME SIZE**, showing desired bar centres

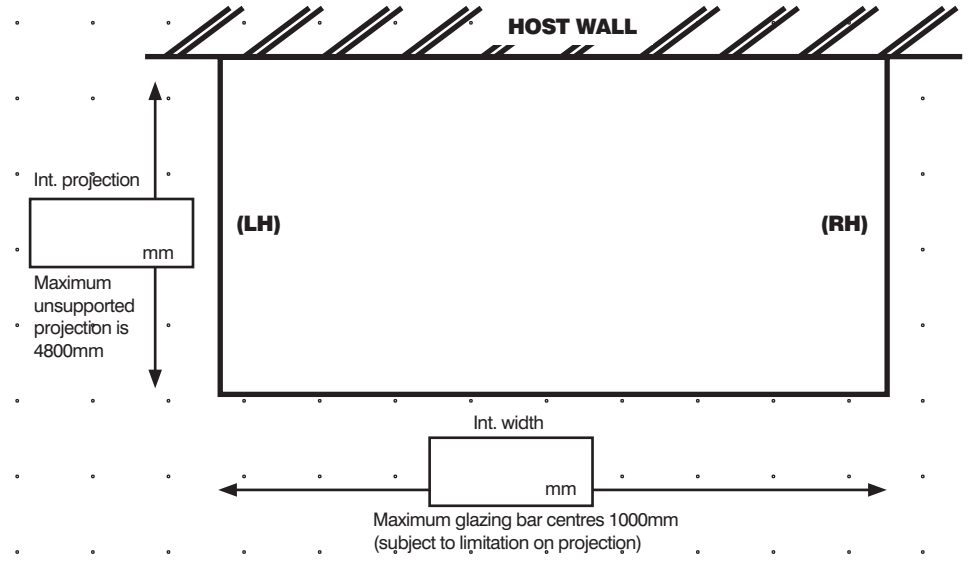

Roof site inspection
Pose code
Frame thickness

Abutment bars
Please indicate wall side details.

Box gutter
Please attach the separate box gutter order form along with this completed sheet

Roof vents
Please indicate location

Roof Pitch
Min 2.5°
Max 10.0°

Account No.

Company Name >

Order Number >

Job Reference >

Company Contact >

Telephone No. >

Fax No. >

Delivery Address >

Delivery Date Req >

Quotation Ref >

COLOUR/FOIL OPTIONS

EXTERNAL COLOUR

White Deepplas (blue white) Mahogany Light Oak Rosewood

INTERNAL COLOUR

White Deepplas (blue white) Mahogany Light Oak Rosewood

GLAZING BAR OPTIONS

TOP CAPPINGS

Standard Caps Chambered Dome Chambered Bevel

UNDERCLADDINGS

Standard Decorative

GLAZING OPTIONS

POLYCARBONATE THICKNESS

25mm 35mm 35mm polycarbonate roofs - 972mm is the maximum dimension from internal frame lie to the first transom bar

POLYCARBONATE COLOUR

Clear Opal Bronze Bronze/Opal Heatguard Unglazed (for 24mm glass)

GLASS

ANTI SUN (1.2) ANTI SUN (1.5) CLEAR
A1 (Blue) **A2** (Grey) **B1** (Blue) **B2** (Grey) **C1** (1.2) **C2** (1.5)
 CONSERVAGLASS
Blue **NC**

SPACER BAR COLOUR

Silver Bronze Gold White

ROTABOND SEALANT

White Black

ROOF OPTIONS LEFT HAND (LH) & RIGHT HAND (RH)

Firing Short abutment Full abutment Hipped end (Plus)
 LH RH LH RH LH RH LH RH
short abutment = 1/2 internal projection

FIRING REINFORCEMENT

None Aluminium Aluminium & Steel Raked Frame
(not supplied by Ultraframe)

CONSERVAFLASH

Yes No

GUTTERING

Left Side Right Side

ROOF VENT OPTIONS

MANUAL

Chrome Brass Pole

ELECTRIC

Switch Thermo/Rain Sensor

ANCILLARIES

FAX BACK TO PREMIER FRAMES on 01162 264 009

Email:sales@premierframes.co.uk

DATE