



Lightweight Roof Tiles Designed for Life

unique high performance shingles

extraLIGHT
LIGHT WEIGHT ROOF TILE SYSTEM

by

SupaLite
TILED ROOF SYSTEM

The logo for 'extraLIGHT' features the word 'extra' in a bold, blue, lowercase sans-serif font, followed by 'LIGHT' in a grey, uppercase sans-serif font. Below this, the words 'LIGHT WEIGHT ROOF TILE SYSTEM' are written in a smaller, grey, uppercase sans-serif font. A stylized grey 'X' shape is positioned behind the 'e' in 'extra' and extends across the 'L' in 'LIGHT'.

extraLIGHT

LIGHT WEIGHT ROOF TILE SYSTEM

SupaLite are proud to introduce the new ExtraLight roof tile, a new and unique high performance lightweight textured tile.

The ExtraLight textured-finish tile captures the subtle look and charm of low-profile traditional roof tiles.

With an ExtraLight tiled roof, you can eliminate the delaminating, lifting and general break-down caused by strong UV rays and high winds associated with similar lightweight tiles.

With its exceptional durability, an ExtraLight tiled roof offers superior performance and all the advantages of stone-coated steel.

The ExtraLight tile comes in a choice of natural weathered tones to recreate the visual appeal of a natural clay tiled roof.

**UNIQUE HIGH PERFORMANCE
LIGHTWEIGHT TILES**

The **extra**LIGHT Roof Tiling System

UNIQUE HIGH PERFORMANCE TEXTURED TILES

THE LOW-PROFILE APPEAL OF SHINGLE

Extensive research and development in the design process ensures every ExtraLight product is manufactured to the highest quality with exceptional durability and strength. The tile profiles and roofing accessories are engineered to interlock and overlap to resist wind lifting and keep out the harsh elements. At less than 7kg/m², our ExtraLight tile is suitable for lightweight roof construction, so considerable cost savings can be achieved during construction. The perfect replacement for your old existing roof, letting you improve the look and value of your home in a matter of days.




All of ExtraLight's roofing products are fabricated from Zinalume[®] protected steel. ExtraLight's textured finish provides added protection by embedding natural stone granules in an acrylic base-coat. A final clear acrylic over-glaze is applied before being oven cured. This extremely durable UV-resistant coating enables our roofing products to withstand the harshest conditions. Independent test reports, appraisals and field results confirm our products are 100% waterproof, fire resistant and able to withstand hurricane-force winds of up to 120mph. An ExtraLight roof




will not only safeguard your investment but will also give you complete peace of mind.

You will not find a more durable, versatile and attractive roofing product on the market that will surpass ExtraLight's quality and affordability.

DURABILITY

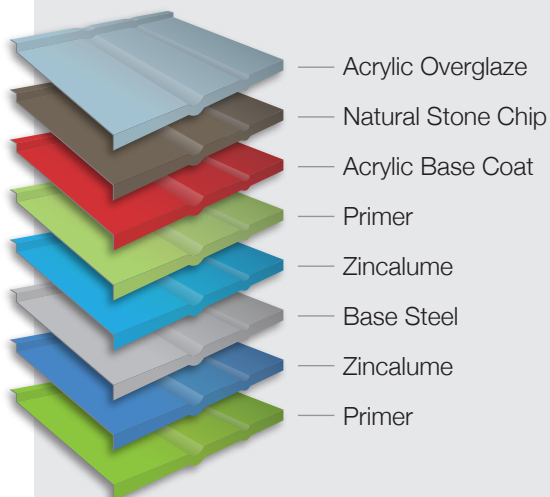

TILE COLOURS



SPECIFICATIONS

Overall Length	1340mm
Length of Cover	1250mm
Width of Cover	255mm
Roof Cover per Tile	0.32m ²
Tiles per m²	3.2
Weight per Tile	2.0kg
Weight per m²	6.40kg
Minimum Roof Pitch	15°

PROFILE



ACCESSORIES


ExtraLight offer a full range of roof tile accessories to compliment your choice of tile. We are only able to show a small selection on this page. All accessories are offered in each of the tile colours.

Ridge



Specifications
Length: 1300mm
Width: 150mm

2 Part Barge



Specifications
Length: 1250mm

Ridge End Cap



Specifications
Length: 240mm
Width: 150mm

3 Way Top Cap



Specifications
Length: 375mm
Width: 340mm

90° Hip End Cap (also available as 135°)



Specifications
Length: 200mm
Width: 125mm

5 Way Top Cap



Specifications
Length: 500mm
Width: 500mm

Repair Kit

